

7-23-2020

INVESTIGATION OF AN ELECTROMAGNETIC TWO-STROKE VIBRATING ACTIVATOR IN OSCILLATORY MODE

A.I. Rakhmatullayev

Tashkent State Technical University, xasan.akramov@tdtu.uz

K.G. Abidov

Tashkent State Technical University

Follow this and additional works at: <https://btstu.researchcommons.org/journal>



Part of the [Electrical and Computer Engineering Commons](#)

Recommended Citation

Rakhmatullayev, A.I. and Abidov, K.G. (2020) "INVESTIGATION OF AN ELECTROMAGNETIC TWO-STROKE VIBRATING ACTIVATOR IN OSCILLATORY MODE," *Technical science and innovation*: Vol. 2020: Iss. 2, Article 8.

DOI: <https://doi.org/10.51346/tstu-01.20.2-77-0063>

Available at: <https://btstu.researchcommons.org/journal/vol2020/iss2/8>

This Article is brought to you for free and open access by Technical Science and Innovation. It has been accepted for inclusion in Technical science and innovation by an authorized editor of Technical Science and Innovation.

INVESTIGATION OF AN ELECTROMAGNETIC TWO-STROKE VIBRATING ACTIVATOR IN OSCILLATORY MODE

A.I.Rakhmatullayev¹, K.G.Abidov¹
¹Tashkent State Technical University

Abstract. The article considers the results of the study of electromagnetic vibration exciter with sequentially included capacitor in the electrical circuit, consisting of mechanical and electrical subsystems. It is shown that by means of the Lagrangian-Maxwell equation the interconnection between mechanical and electric subsystems can be realized. The relations describing processes of establishment of amplitudes and phases of oscillations both in mechanical and in electric subsystems are deduced. The equations connecting the output (amplitude) of vibration of the vibrating exciter with its input (voltage) of the network are presented. As a result, the formulas allowing making corrections at the solution of the system describing operation of the electromagnetic vibrating exciter in two-stroke mode are presented.

Key words: vibrating exciter, vibrating system, Lagrangian-Maxwell equations, electromagnetic processes, inductance, equations linking amplitude and phase parameters, exponential function, integration, one-act operation mode, and capacitor.

Electromagnetic vibrators have been increasingly employed in the instrument in recent years-and in mechanical engineering. An elastic mechanical circuit system often has to be set up far enough away from the resonance, depending on the specific requirements of the vibration control system. Therefore a method suitable for calculating these vibrators needs to be developed.

Lagrangian-Maxwell equations (1) describe the interlinked electromagnetic and mechanical processes within the electromagnetic vibrator which is an electromechanical system.

$$\left. \begin{aligned} \frac{d}{dt} \frac{\partial L}{\partial x} + \frac{\partial H}{\partial x} - \frac{\partial L}{\partial x} &= f \\ \frac{d}{dt} \frac{\partial L}{\partial q} + \frac{\partial R}{\partial q} - \frac{\partial L}{\partial q} &= e \end{aligned} \right\} \quad (1)$$

Where the variables q x - charge and travel respectively, $q=i$ and $x=\vartheta$ their speeds, e =external E.E.S., f external mechanical force, R and H are the so-called electrical and mechanical dissipation functions of the Relay respectively

$$R = \frac{1}{2} \sum_k r_k i_k^2, \quad H = \frac{1}{2} \sum_n h_n \vartheta_n^2$$

Where variables q x -function Lagrange- $L=(T+W)-(\Pi^+ +V)$, $T=\frac{1}{2} m\vartheta^2$ is kinematic energy of mechanical moving part of vibrator; m -mass, $\Pi = \frac{1}{2} cx^2$ - potential energy, c -hardness, $W=\frac{1}{2} \frac{\omega^2 i^2}{R_M} = \frac{1}{2} R_M \Phi^2$ -magnetic energy of electric part of vibrator, $\Phi = \frac{\omega * i}{R_M}$, $\omega \Phi = \Psi$, ω - number of turns, Φ - magnetic flux, R_M - magnetic resistance of the flux path, $R_M = R_c + \frac{2(x_0+x)}{\mu_0 S}$, t.e. consists of the magnetic resistance of steel and gap, V -electric energy of the capacitor. Let the electromagnetic vibrator two-pin, does not contain in the electrical circuit of the capacitor, therefore, $V = 0$; it is not affected by external mechanical force, $f = 0$; the electrical circuit

operates alternating DC voltage, the sign of which changes with the frequency of the vibrator moving part. In this way the auto oscillation mode is investigated.

So, the Lagrange function of this vibrator

$$L = \frac{1}{2} m \dot{\vartheta}^2 + \frac{1}{2} \left[\frac{2(x_0+x)}{\mu_0 S} + R_c \right] \Phi^2 - \frac{1}{2} c x^2 \quad (2)$$

By putting it and its dissipative functions in the system, we will get

$$\left. \begin{aligned} m \frac{d^2 x}{dt^2} + h \frac{dx}{dt} + cx &= \frac{\Psi^2}{\omega^2 \mu_0 S} \\ \frac{d\Psi}{dt} + \frac{r}{\omega^2} \left[R_c + \frac{2(x_0+x)}{\mu_0 S} \right] \Psi &= \frac{4E}{\pi} * \sum_{n=1}^{\infty} \frac{(-1)^{3n-1}}{2n-1} \cos(2n-1) \omega t \end{aligned} \right\} \quad (3)$$

Although the circuit of the electromagnet is alternating DC voltage with high harmonics, in the threading clutch Ψ the corresponding high harmonics are strongly attenuated. Indeed, if we assume $r=0$ for simplicity, then we obtain the following:

$$\begin{aligned} \Psi &= \frac{4E}{\pi} \int (\cos \omega t - \frac{1}{3} \cos 3\omega t + \frac{1}{5} \cos 5\omega t - \dots) dt = \\ &= \frac{4E}{\pi \omega} (\sin \omega t - \frac{1}{9} \sin 3\omega t + \frac{1}{25} \sin 5\omega t - \dots) \end{aligned}$$

i.e. the amplitude of the third one closest to the main harmonic is almost an order of magnitude smaller than the first one. Therefore, in the first approximation, we will not consider their influence. Therefore, we can assume that the voltage is acting $e = \frac{4E}{\pi} \cos \omega t$

In the theory of nonlinear mechanics we add the normal substitution of variables to solve the system of equations (1).

$$x = A(t) \cos[\omega t + \psi(t)], \quad \frac{dx}{dt} = -A(t) \omega \sin[\omega t + \psi(t)], \quad (4)$$

$$\Psi = B(t) \cos[\omega t + \varphi(t)], \quad \frac{d\Psi}{dt} = -B(t) \omega \sin[\omega t + \varphi(t)], \quad (5)$$

By means of which the system of equations (3) for instantaneous variables can be replaced by a system of equations for amplitudes $A(t)$, $B(t)$ and phases $\Psi(t)$, $\varphi(t)$, and solved with respect to their derivatives.

The square of the threading clutch is shown over the period graph in Fig. 1. But in the two-stroke vibrator in one half-period in one core works curve «а» этого graphics, in the other half-period in the other core - curve «б». So the last curve can be flipped (curve «в»). For the period T the curve «а+в» можно should be described with the function

$$\begin{aligned} \Psi^2 &= B^2 \frac{\pi}{4} \left[\cos(\omega t + \varphi) + \frac{1}{3} \cos 3(\omega t + \varphi) + \frac{1}{5} \cos 5(\omega t + \varphi) + \dots \right] \\ &= \frac{\pi}{4} B^2 \sum_{n=1}^{\infty} \frac{1}{2n-1} \cos(2n-1)(\omega t + \varphi) \end{aligned} \quad (6)$$

We differentiate the second expressions (4) and (5).

$$\frac{d^2x}{dt^2} = -\frac{dA}{dt}\omega \sin(\omega t + \psi) - \left(\omega + \frac{d\psi}{dt}\right)A\omega \cos(\omega t + \psi) \quad (7)$$

$$\frac{d^2\psi}{dt^2} = -\frac{dB}{dt}\omega \sin(\omega t + \varphi) - \left(\omega + \frac{d\varphi}{dt}\right)B\omega \cos(\omega t + \varphi) \quad (8)$$

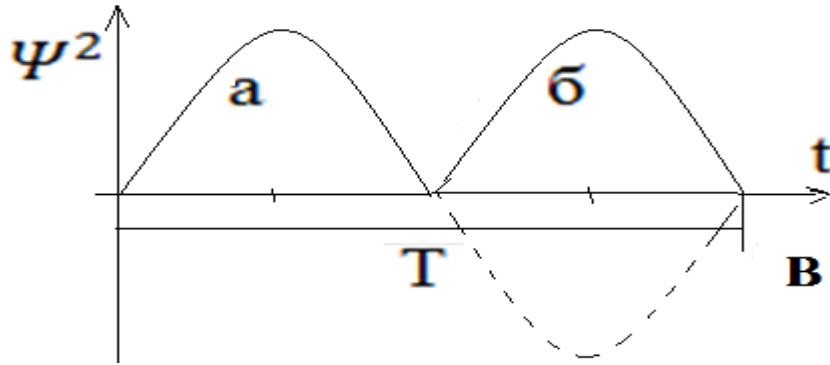


Fig.1. Slotting curve of the two-stroke vibrating activator.

Let's substitute the expressions x , $\frac{dx}{dt}$, $\frac{d^2x}{dt^2}$, и ψ , $\frac{d\psi}{dt}$, $\frac{d^2\psi}{dt^2}$, in a system

$$(3) \frac{dA}{dt} \sin(\omega t + \psi) + \frac{d\psi}{dt} A\omega \cos(\omega t + \psi) = \frac{\pi B^2 \sum_{n=1}^{\infty} \frac{1}{2n-1} \cos(2n-1)(\omega t + \varphi)}{4\omega^2 \mu_0 m S \omega} - A \frac{h}{m} \sin(\omega t + \psi), \quad (9)$$

$$\begin{aligned} \frac{dB}{dt} \sin(\omega t + \varphi) + \frac{d\varphi}{dt} B \cos(\omega t + \varphi) &= \frac{4}{\pi} \sin(\omega t) - \omega B \cos(\omega t + \varphi) - \\ &- \frac{R}{\omega^2} B \sin(\omega t + \varphi) \left\{ \frac{2}{\mu_0 S} * [x_0 + A \cos(\omega t + \psi)] + R_c \right\} - \\ &- \frac{R}{\omega^2} B \cos(\omega t + \varphi) \frac{2}{\mu_0 S} A \sin(\omega t + \psi), \end{aligned} \quad (10)$$

Differentiating the first expression and comparing it with the second one both in (4) and (5), we get

$$\frac{dA}{dt} \cos(\omega t + \psi) - \frac{d\psi}{dt} A \sin(\omega t + \psi) = 0 \quad (11)$$

$$\frac{dB}{dt} \cos(\omega t + \varphi) - \frac{d\varphi}{dt} B \sin(\omega t + \varphi) = 0 \quad (12)$$

These equations should be considered as constraints imposed respectively on functions $A(t)$, $\psi(t)$, and $B(t)$, $\varphi(t)$ in the sense that $\frac{dA}{dt} \ll A\omega$, $\frac{d\psi}{dt} \ll \omega$, т. е. $\Delta A \ll A$, $\Delta\psi \ll 2\pi$ for the period $T = \frac{2\pi}{\omega}$ and also, $\frac{dB}{dt} \ll B\omega$, $\frac{d\varphi}{dt} \ll \omega$, т. е. $\Delta B \ll B$, $\Delta\varphi \ll 2\pi$ for the period $T = \frac{2\pi}{\omega}$. Solving in pairs (9), (11) and (10), (12), we find equations in standard form presented with respect to derivative parameters of mechanical and electrical oscillations.

$$\left. \begin{aligned} \frac{dA}{dt} &= - \left[A \frac{h}{m} \sin(\omega t + \psi) + \frac{\pi B^2 \sum_{n=1}^{\infty} \frac{1}{2n-1}}{\omega^2 \mu_0 m S \omega} * \cos(2n-1)(\omega t + \varphi) \right] \sin(\omega t + \psi) \\ \frac{d\psi}{dt} &= - \frac{1}{A} \left[A \frac{h}{m} \sin(\omega t + \psi) + \frac{\pi B^2 \sum_{n=1}^{\infty} \frac{1}{2n-1}}{\omega^2 \mu_0 m S \omega} * \cos(2n-1)(\omega t + \varphi) \right] \cos(\omega t + \psi) \end{aligned} \right\} \quad (13)$$

$$\begin{aligned} \frac{dB}{dt} &= \left\{ \frac{\pi}{4} E \sin \omega t - B \omega \cos(\omega t + \varphi) - \frac{R}{\omega^2} B \sin(\omega t + \varphi) \left\{ \frac{2}{\mu_0 S} * [x_0 + A \cos(\omega t + \psi)] + R_c \right\} - \right. \\ &\quad \left. - \frac{2R}{\omega^2 \mu_0 S} B \cos(\omega t + \varphi) A \sin(\omega t + \psi) \right\} \sin(\omega t + \varphi) \\ \frac{d\varphi}{dt} &= \left\{ \frac{4E}{\pi B} \sin \omega t - \omega \cos(\omega t + \varphi) - \frac{R}{\omega^2} \sin(\omega t + \varphi) \left\{ \frac{2}{\mu_0 S} * [x_0 + A \cos(\omega t + \psi)] + R_c \right\} + \right. \\ &\quad \left. + \frac{2R}{\omega^2 \mu_0 S} B \cos(\omega t + \varphi) A \sin(\omega t + \psi) \right\} \cos(\omega t + \varphi) \quad (14) \end{aligned}$$

Proceeding from the above limitations and considering the oscillation parameters as invariable over the period, the right parts of equations (13) and (14) assiduously integrate them over the period T. As a result, in the first approximation we will get

$$\left. \begin{aligned} \frac{dA_1}{dt} &= -\frac{hA_1}{2m} + \frac{\pi B_1^2}{8\omega^2 \mu_0 m S \omega} \sin(\varphi_1 - \psi_1) \\ \frac{d\psi_1}{dt} &= -\frac{\pi B_1^2}{8\omega^2 \mu_0 m S \omega A_1} \cos(\varphi_1 - \psi_1) \end{aligned} \right\}, \quad (15) \quad \left. \begin{aligned} \frac{dB_1}{dt} &= -\frac{R}{2\omega^2} \left(\frac{2x_0}{\mu_0 S} + R_c \right) B_1 + \frac{4}{2\pi} E \cos \varphi_1 \\ \frac{d\varphi_1}{dt} &= -\frac{\omega}{2} - \frac{4}{2\pi B_1} E \sin \varphi_1 \end{aligned} \right\}. \quad (16)$$

Using these equations one can investigate both the established mode, $d\psi$, and the processes of amplitude and phase setting of oscillations. In the established mode $\frac{dA_1}{dt} = \frac{d\psi_1}{dt} = \frac{dB_1}{dt} = \frac{d\varphi_1}{dt} = 0$ therefore $\cos(\varphi_1 - \psi_1) = 0$, hence $(\varphi_1 - \psi_1) = \frac{\pi}{2}$ or $(\varphi_1 - \psi_1) = \frac{3\pi}{2}$. But the last ratio for phases does not satisfy the first equation (15).

$$A_1 = \frac{\pi B_1^2}{4\omega^2 \mu_0 m \omega S h}; \quad (\varphi_1 - \psi_1) = \frac{\pi}{2} \quad (17)$$

From the system (16), we find

$$\begin{aligned} A_1 &= \frac{\pi E}{4 \sqrt{\omega^2 + \frac{R^2}{2\omega^4} \left(\frac{2x_0}{\mu_0 S} + R_c \right)}} = \frac{4EL_0}{\pi \sqrt{\omega^2 L_0^2 + R^2}} \\ \varphi_1 &= \arctg \frac{-\omega L_0}{R} \end{aligned} \quad (18)$$

Where $L_0 = \frac{\omega^2}{\frac{2x_0}{\mu_0 S} + R_c}$ - static vibrator electromagnet inductance

Now the solution (18) by substituting (17) we get

$$A_1 = \frac{4E^2 L_0^2}{\pi \omega^2 \mu_0 \omega S h (\omega^2 L_0^2 + R^2)}; \quad (19)$$

Applied to the standard form of equations (13) and (14), the perturbation theory method[2] makes it possible to find high approximations of the necessary vibration parameters A(t), B(t), $\psi(t)$ $\varphi(t)$. Following the process, we assume that, as in the preceding average, these oscillation parameters in the right parts of equations (13) and (14) are invariable and identical to those found above, and we decompose these right parts into Fourier rows and define the summation variables.

$$\left. \begin{aligned}
\frac{dA_2}{dt}(t) &= \frac{A_2 h}{2m} \cos 2(\omega t + \psi_1) - \frac{\pi B_1^2}{8p} \sin(2\omega t + \varphi_1 + \psi_1) + \frac{\pi B_1^2}{24p} \sin(2\omega t + 3\varphi_1 - \psi_1) - \dots, \\
\frac{d\psi_2(t)}{dt} &= -\frac{h}{2m} \sin 2(\omega t + \psi_1) - \frac{\pi B_1^2}{8pA_1} \cos(2\omega t + \varphi_1 + \psi_1) - \\
&\quad - \frac{\pi B_1^2}{24pA_1} \cos(4\omega t + 3\varphi_1 - \psi_1) + \dots, \\
\frac{dB_2(t)}{dt} &= -\frac{2E}{\pi} \cos(2\omega t + \varphi_1) - \frac{\omega B_1}{2} \sin(\omega t + \varphi_1) + \frac{R}{2L_0} B_1 \cos 2(\omega t + \varphi_1) - \\
&\quad - \frac{R}{K} B_1 A_1 \cos(3\omega t + \varphi_1 + \psi_1) \\
\frac{d\varphi_2(t)}{dt} &= \frac{2E}{\pi B_1} \sin(2\omega t + \varphi_1) - \frac{\omega}{2} \cos(\omega t + \varphi_1) - \frac{R}{2L_0} \sin 2(\omega t + \varphi_1) - \\
&\quad - \frac{R}{K} A_1 \sin(3\omega t + 2\varphi_1 + \psi_1)
\end{aligned} \right\} (20)$$

Where: $\rho = \omega \mu_0 \omega^2 m S$, $k = \omega^2 \mu_0 S$.

By integrating them, we get them:

$$A(t) = A_1 + A_2(t) = A_1 + \frac{Ah}{4\omega m} \sin 2(\omega t + \psi_1) + \frac{\pi B_1^2}{16p\omega} \cos(2\omega t + \varphi_1 + \psi_1) - \frac{\pi B_1^2}{48p\omega} \cos(2\omega t + 3\varphi_1 + \psi_1) + \dots,$$

$$\begin{aligned}
\psi(t) = \psi_1 + \psi_2(t) &= \varphi_1 - \frac{\pi}{2} + \frac{h}{4\omega m} \cos 2(\omega t + \psi_1) - \frac{\pi B_1^2}{16pA_1\omega} \sin(2\omega t + \varphi_1 + \psi_1) - \\
&- \frac{\pi B_1^2}{48pA_1\omega} \sin(\omega t + 3\varphi_1 - \psi_1) - \dots,
\end{aligned}$$

$$\begin{aligned}
B(t) = B_1 + B_2(t) &= B_1 - \frac{E}{\pi\omega} \sin(2\omega t + \varphi_1) + \frac{B_1 Z}{2} \sin[2(\omega t + \varphi_1) + \xi] - \\
&- \frac{R}{k\omega} B_1 A_1 \sin(\omega t + \psi_1) + \frac{R}{3K\omega} B_1 A_1 \sin(3\omega t + 2\varphi_1 + \psi_1),
\end{aligned}$$

$$\begin{aligned}
\varphi(t) = \varphi_1 + \varphi_2(t) &= \varphi_1 - \frac{E}{\pi B_1 \omega} \cos(2\omega t + \varphi_1) + \frac{Z}{2} \cos[2(\omega t + \varphi_1) + \xi] - \\
&- \frac{R}{K\omega} A_1 \cos(\omega t + \psi_1) + \frac{R}{3K\omega} A_1 \sin(3\omega t + 2\varphi_1 + \psi_1),
\end{aligned} \tag{21}$$

Where :

$$Z^2 = \omega^2 + \frac{R^2}{L_0^2}; \quad \xi = \arctg \frac{\omega L_0}{R}.$$

Having substituted them in formal expressions of solutions (4) and (5), we find it finally:

$$\left. \begin{aligned}
x &= A_1 \cos(\omega t + \psi_f) + \frac{A_1 h}{8m\omega} \sin(\omega t + \psi_f) + \frac{\pi B_1^2}{2 \cdot 16p\omega} \cos(\omega t + \varphi_1) - \\
&\quad - \frac{\pi B_1^2}{48p\omega} * \frac{1}{2} \cos(\omega t + 3\varphi_1 - 2\psi_1) + \quad \text{high} \\
\Psi &= B_1 \cos(\omega t + \varphi_1) - \frac{E}{2\pi\omega} \sin \omega t + \frac{B_1 Z}{2\omega \cdot 2} \sin(\omega t + \varphi_1 + \xi) + \\
&\quad + \frac{R}{K\omega^2} B_1 * A_1 \sin(\varphi_1 - \psi_1) + \quad \text{high}
\end{aligned} \right\} (22)$$

Based on these refined solutions, it is now possible to explain first approximations of the amplitudes of the fundamental harmonics (17) and (18)

Result of the work:

1. Throughout the recorded works devoted to the study of electromagnetic vibrators, represented by species equations (3), the latter were solved artificially (the second equation is separate from the first): either it was assumed in the second equation $r = 0$, or it was transformed into an independent parametric equation.

The general dependence of the oscillation half-span on the parameters was obtained for the first time because of the joint solution of the equations: external voltage, excitation frequency, friction, electrical circuit resistances.

2. The theoretical and practical correlation (19) shows a sharp frequency limit from above in the field of application of vibrators, which is imposed on the oscillation amplitude. As can be seen from (19), if the active resistance of the electromagnet is significant in comparison with the inductive resistance, then half a span. A, we can consider that it is inversely proportional to the excitation frequency in the first degree; if the inductive resistance of the electromagnet is much greater than the active resistance, then semi-span A is inversely proportional to the excitation frequency in the cube, i.e. for such vibrators at high frequencies of excitation is impossible to obtain a sufficiently large oscillation amplitude.

3. The correlation (19) can be of great practical importance because it helps to find friction in this vibrator design, which previously caused great difficulties to be identified, based on the data on the frequency of excitation and oscillation amplitude known from the experience.

4. The system of perturbation theory has obtained clarifications of the solutions. Specifications demonstrated complete interconnection of electromagnetic and mechanical processes, and the effect of not only the electrical component on the mechanical part.

References

1. Vibrations in technology, 1 and 2, publishing house "Machine Building", Moscow, 1978.
2. Bogolyubov N.N. Perturbations Theory in Nonlinear Mechanics. Proceedings of the Institute of Construction Mechanics, Academy of Sciences of the Ukrainian SSR, 4,1950. UDC 697.34:536.7.001.8.
3. Demirchyan K.S., Neumann L.R., Korovkin N.V., Chechurin V.L. Theoretical bases of electrical engineering. Textbook for High Schools. Volume 1. Peter, 2003. 463 p.
4. Tu.Yu. Modern Theory of Control. -M.; Mashinostroenie, 1971. 300 p.
5. Samsonov, I.D.; Tillyakhodzhaev, M.M. .Bazarov, N.H. To determination of the structural scheme of an electromagnetic vibrator with amplitude frequency control. Electrotechnical Industry.Elektroprodukt.1981 v.9(98), 8-9 p.
6. Matkhanov, P.N. Basics of the electrical circuits analysis. Nonlinear circuits. M.:Vyshaya Shkola, 1977. 272 p.
7. Tondle A." Auto oscillation of mechanical systems. "M.:Mir, 1979. 429 p.
8. Bessonov L.A. Theoretical fundamentals of electrical engineering. Electrical circuits. -9 ed.M., Higher school, 1996.-638 p.
9. Tillyakhodjaev, M.M. Auto oscillation in the electromechanical vibration arrangement.
10. Amirov CF, Yakubov MS, Jabborov N.G. Theoretical foundations of electrical engineering. (first book) TSTU, 2006 -144 b.
11. Karimov AS Theoretical Electrical Engineering. -T .: Teacher, 2003. -428 p.
12. Amirov SF, Yaqubov MS, Jabborov NG, Sattorov HA, Balgaev N.E. Collection of problems from theoretical bases of electrical engineering.-T: Sparks of Literature, 2015. -420 p.

13. John Bird. "Electrical and Electronic Principles and Technology" LONDON AND NEW YORK, 2014.-455 p.
14. Abidov, K.G.; Rakhmatullaev, A.I. Investigation of an electromagnetic vibration-excitation device with a series-connected capacitor in an electric circuit. -Tashkent: TSTU, 2018 №3.58-63 p.
15. Abidov, K.G.; Rakhmatullaev, A.I. Possibility of application of a reciprocity principle at conversions of currents and voltages on the nonlinear four-poles. // TSTU.2019 №1.80-84 p.
16. Abidov, K.G.; Rakhmatullaev, A.I. Research of interconnection of the mechanical and electric processes of the investigated electromagnetic vibration-excitation. International Scientific Journal. Technique Engineering Technology № 4, 2018 Russia, Kazan, 10-14 p.